




Motor/ Drive torque speed test data


Drive	7080
Motor	HT17-075
Current	1.6A
Connection	Parallel
Voltages	24-48-80
Resolutions	Full/2000

Test Parameters	
Test Date	9/15/2003
Test Rig	Magtrol 1-100
Other	

Resolution	Full		
Speed (rps)	Torque (oz-in)		
Voltage	24V	48V	80V
1	0	47	0
2	0	46.5	0
3	0	46	0
4	0	45	0
5	0	44.5	0
10	0	41.5	0
15	0	39	0
20	0	36.5	0
25	0	33	0
30	0	29	0
35	0	27	0
40	0	24	0

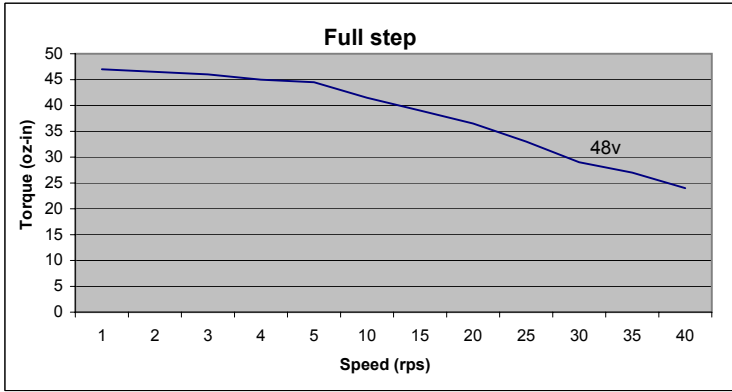

Resolution	2000		
Speed (rps)	Torque (oz-in)		
Voltage	24V	48V	80V
1	0	36	0
2	0	34	0
3	0	32.5	0
4	0	31.5	0
5	0	30.5	0
10	0	29.5	0
15	0	27	0
20	0	24.5	0
25	0	22	0
30	0	17	0
35	0	17	0
40	0	13	0

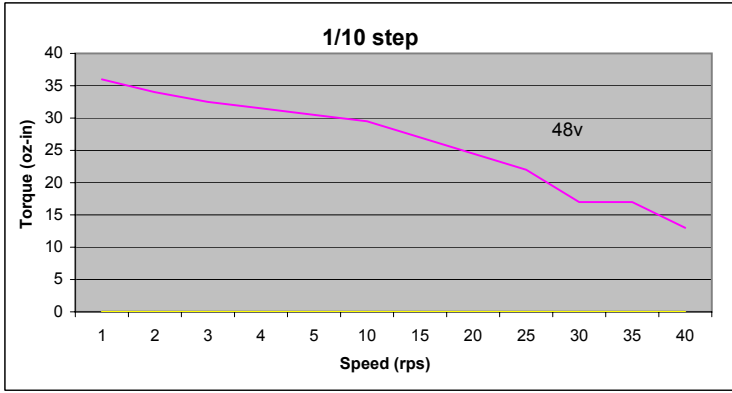

NOTE

Information for these curves is derived from physical tests on a dynamometer with the selected motor and drive. Curves indicate the point at which the motor stalls and may not show system resonances. When selecting a motor customers should allow a suitable safety margin.

Performance is application dependant and will vary with different mechanical arrangements. Mounting and ambient temperature will also effect thermal characteristics and thus modify the motors ability to deliver the stated torque continuously.