



AIR FLOW →



TB1 AC IN CONNECTIONS	
PIN #	SIGNAL
PIN 1	AC/L
PIN 2	AC/N
PIN 3	FRAME GROUND

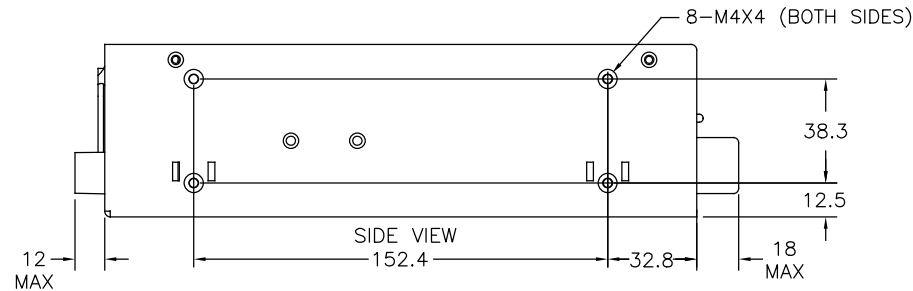


TB2 DC OUT CONNECTIONS	
PIN #	SIGNAL
PIN 1-3	DC OUTPUT -V
PIN 4-6	DC OUTPUT +V

LABEL - LOGO, 1000-375, 48V, 600W, CHASSIS MOUNT.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE ECO 8140	1/29/19	M.Maroney

NOTES: UNLESS OTHERWISE SPECIFIED
 1. THIS ASSEMBLY TO BE MANUFACTURED IN COMPLIANCE WITH THE CURRENT EU RoHS DIRECTIVE.

THIS SHEET DESCRIBES OVERALL SIZE AND MOUNTING.
 FOR LATEST SPECIFICATIONS, REFER TO APPLIED MOTION WEBSITE: www.applied-motion.com
www.applied-motion.com



TOLERANCES	
DECIMALS: MM (INCH)	X.XXX = ±0.127 (.005)
	X.XX = ±0.25 (.01)
	X.X = ±2.5 (0.1)
ANGLES:	MACH. = ±.5°
	CHAM. = ±5°

CONTRACT NO. -	
APPROVALS	DATE
DRAWN <i>R.JONEZ</i>	1/25/19
CHECKED	
APPROVED	
APPROVED	

APPLIED MOTION PRODUCTS, INC.

POWER SUPPLY, PS600A48
48V, 600W ACTIVE PFC FUNCTION

D	FSCM NO.	DWG NO.	1000-375
SCALE: NONE			REV A

SHEET 1 OF 1