


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE 4332		
B	CHG CABLE VEND'R 5106		
C	ADD NOTE PER ECO 5147	8/3/04	R.BARRICK
D	UPDATE PER ECO 5268	2/1/06	
E	UPDATE PER ECO 5735	4/24/08	J.KORDIK
F	UPDATE PER ECO 6107	5/24/10	J.KORDIK
G	UPDATE PER ECO 6391	10/20/11	J.AMOS
H	UPDATE PER ECO 6559	7/10/12	J.KORDIK
J	UPDATE PER ECO 7092	11/6/14	J.KORDIK

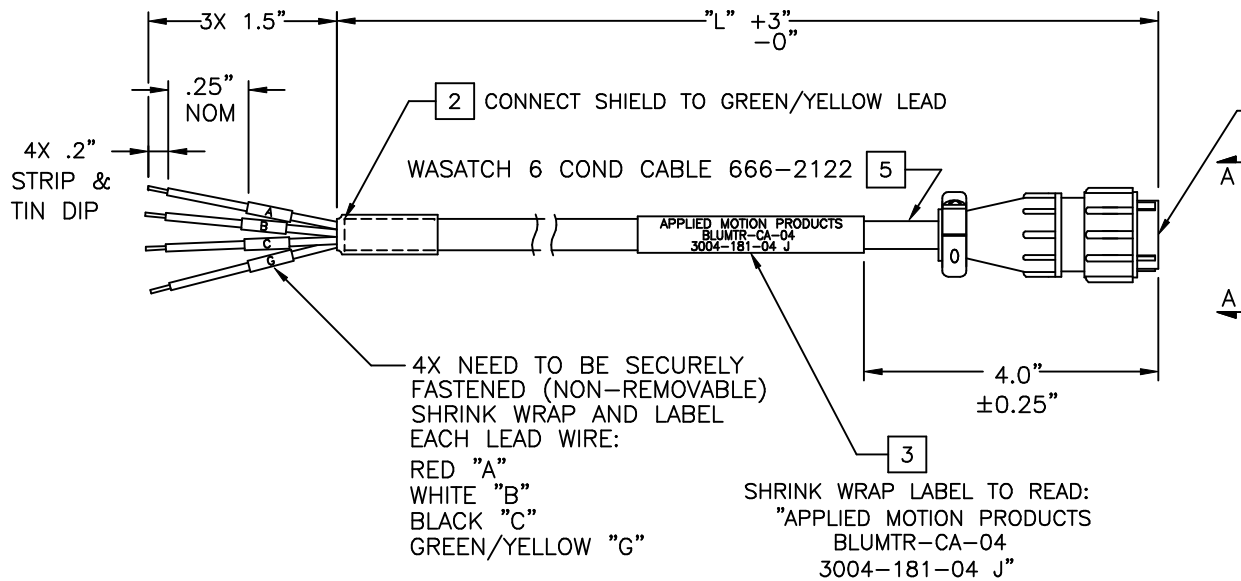

TO: MOTOR  
 HOUSING: AMP #206060-1  
 CONTACTS: AMP #1-66101-8(4X)  
 CABLE CLAMP: AMP #206358-5

- 5 CABLE IS SIX CONDUCTOR, CUT BLUE AND YELLOW WIRES AS REQUIRED.
  - 4. REFER TO SEPARATE BOM.
  - 3 CABLE TO BE SHRINK WRAPPED AND MARKED AS SHOWN. LENGTH DICTATES MARKING. EXAMPLE SHOWN ON DRAWING.
  - 2 SHIELD TO BE ATTACHED TO GREEN/YELLOW WIRE SHRINK WRAP TO COVER CONNECTION
  - 1. VENDOR TO INSPECT WIRE TERMINATION. (POSITION TO COLOR, POST ASS'Y).
- NOTES: UNLESS OTHERWISE SPECIFIED

VIEW A-A



VIEW FROM CABLE END

CABLE/CONNECTOR	
PIN #	LEAD COLOR
1	RED
2	WHT
3	BLK
4	GREEN/YELLOW

3 EXTENSION CABLE LENGTH/MARKING CHART

DIM "L"	DESCRIPTION	PART NO/REV
4 FEET	BLUMTR-CA-04	3004-181-04 J
10 FEET	BLUMTR-CA-10	3004-181-10 J
20 FEET	BLUMTR-CA-20	3004-181-20 J

BLuMTR

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.	
DECIMALS: MM (INCH) X.XXX = ±0.01 (.005) X.XX = ±0.10 (.010) X.X = ±0.20 (.020) ANGLES: MACH. = ±.5° CHAM. = ±5°					
COMPUTER DATA BASE DRAWING		APPROVALS	DATE	<b>ALPHA MOTOR POWER CABLE EXTENSION</b> DWG NO. 3004-181 REV J	
		DRAWN R.BARRICK	3/6/01		
		CHECKED			
		APPROVED		SCALE: FULL	SHEET 1 OF 1