


CON A	CONNECTION TABLE		CON B
PIN	LEAD COLOR	SIGNAL	PIN
3	N/C	-	N/C
4	BLACK	GND	8
1	N/C	-	N/C
2	N/C	-	N/C
5	N/C	-	N/C
6	RED	+VCC	7
7	N/C	-	N/C
8	YELLOW	CH B+	3
9	YEL/WHITE	CH B-	4
10	BLUE	CH A+	1
11	BLUE/WHITE	CH A-	2
12	ORANGE	INDEX+	5
13	ORN/WHITE	INDEX-	6
14	N/C	-	N/C
15	N/C	-	N/C
16	N/C	-	N/C
17	N/C	-	N/C
N/C	DRAIN	SHIELD	15

REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
7577	A	INITIAL RELEASE	2/28/17	
7655	B	REVISE CONN 'A'	6/15/17	J KORDIK
7762	C	REVISED DRAWING	11/7/17	D MACLEOD

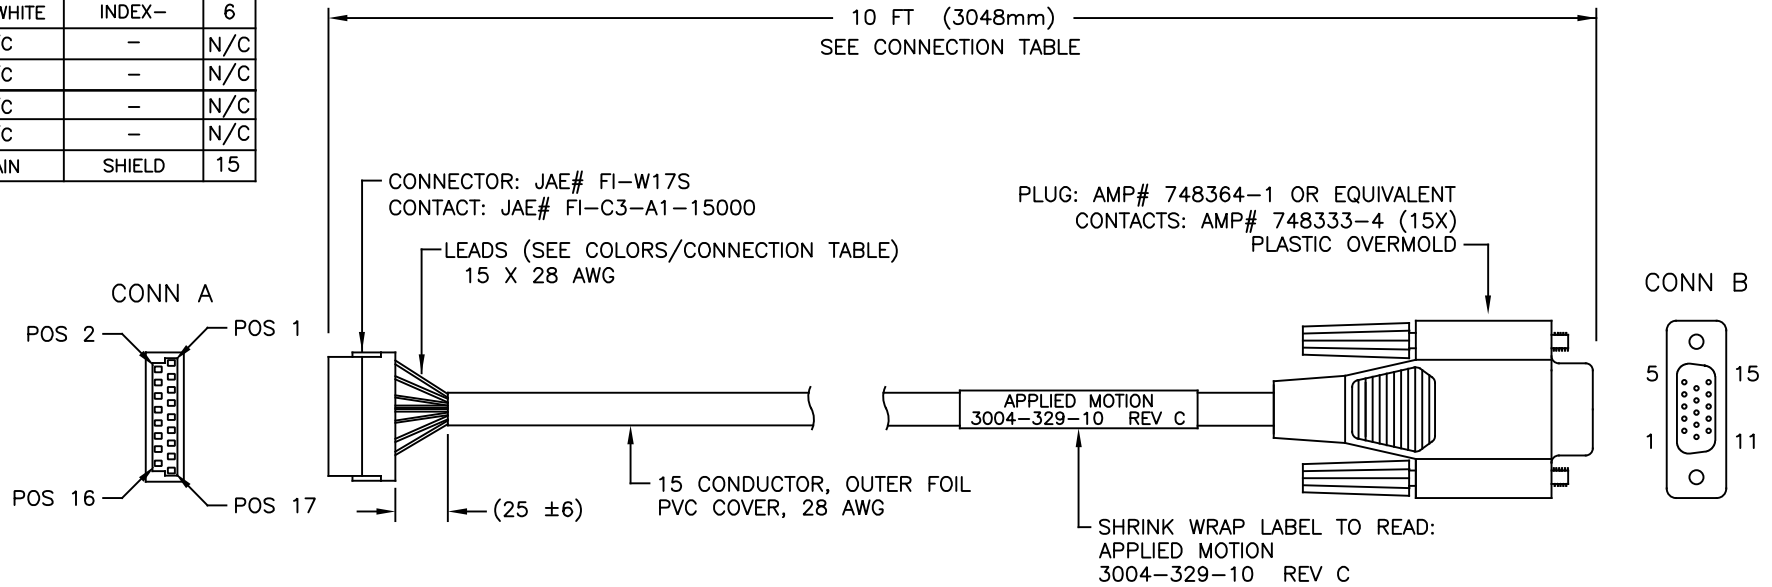

NOTES: UNLESS OTHERWISE SPECIFIED

1. THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EC RoHS DIRECTIVE.
2. TEST 100% FOR OPENS (100 OHMS MAX) AND SHORTS (5 MEGAOHMS MIN)
3. DO NOT SPLICE CABLE.

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.	
DECIMALS: INCH [MM] X.XXX = ±.005 [0.013] X.XX = ±.010 [0.25] X.X = ±.020 [2.5]					
ANGLES: MACH. = ±.5° CHAM. = ±5°		APPROVALS	DATE	ENCODER CABLE ASSY - CAA	
COMPUTER DATA BASE DRAWING		DRAWN N.DEY	11/7/17	B	DWG NO. 3004-329-10
		CHECKED K.KESLER	11/7/17		REV C
		APPROVED		SCALE: NTS	SHEET 1 OF 1