


NOTES: UNLESS OTHERWISE SPECIFIED

1. THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EC RoHS DIRECTIVE.
2. THIS CABLE INTENDED FOR USE WITH STEP-SERVO MOTORS AND SS-EC STEP-SERVO DRIVES.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE ECO 7494	11/14/16	J.KORDIK

J1		
PIN NO:	SIGNAL	WIRE COLOR
1	X1+	BLUE/WHITE
2	X1-	BLUE/BLACK
3	X2+	GREEN/WHITE
4	X2-	GREEN/BLACK
5	X3+	RED
6	X3-	ORANGE
7	X4+	BLUE
8	X4-	PURPLE
9	X5	YELLOW
10	X6	GREEN
11	X7	BROWN
12	X8	GRAY
13	GND	SHIELD
14	XCOM	WHITE
15	GND	BLACK
16	N/C	NO CONNECTION
17	N/C	NO CONNECTION
18	N/C	NO CONNECTION
19	Y1+	BROWN/WHITE
20	Y1-	BROWN/BLACK
21	Y2+	GRAY/WHITE
22	Y2-	GRAY/BLACK
23	Y3+	PURPLE/WHITE
24	Y3-	PURPLE/BLACK
25	Y4+	PINK
26	Y4-	YELLOW/GREEN
27	AOUT+	RED/WHITE
28	AOUT-	RED/BLACK
29	BOUT+	ORANGE/WHITE
30	BOUT-	ORANGE/BLACK
31	ZOUT+	YELLOW/WHITE
32	ZOUT-	YELLOW/BLACK

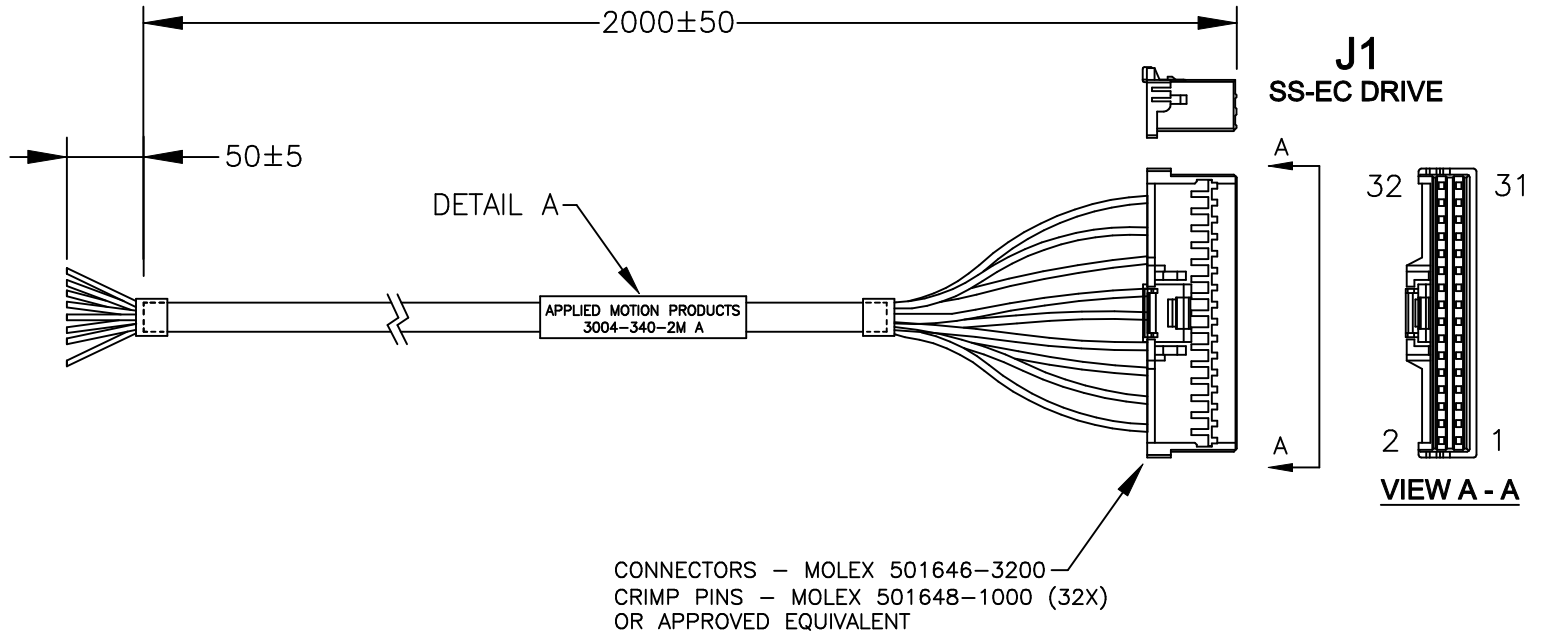

APPLIED MOTION PRODUCTS
3004-340-2M A

LABEL DETAIL A

TOLERANCES DECIMALS: MM X.XXX = ±0.013 X.XX = ±0.25 X.X = ±2.5 ANGLES: MACH. = ±.5° CHAM. = ±5°	THIRD ANGLE PROJECTION 		APPLIED MOTION PRODUCTS, INC. CABLE, SS-EC DRIVE I/O FLYING LEADS
	APPROVALS DRAWN <i>R.JONEZ</i> CHECKED	DATE 9/6/16	
COMPUTER DATA BASE DRAWING	APPROVED	SCALE: NONE	REV A SHEET 1 OF 1