


CABLE CONNECTION CHART			
P1	TWISTED PAIRS	P2	COLOR
1		1	WHITE
2		2	BROWN
3		3	GREEN
4		4	YELLOW
5		5	GREY
6		6	PINK
7		7	BLUE
8		8	RED

REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
8398	A	INITIAL RELEASE	1/13/20	J.KORDIK

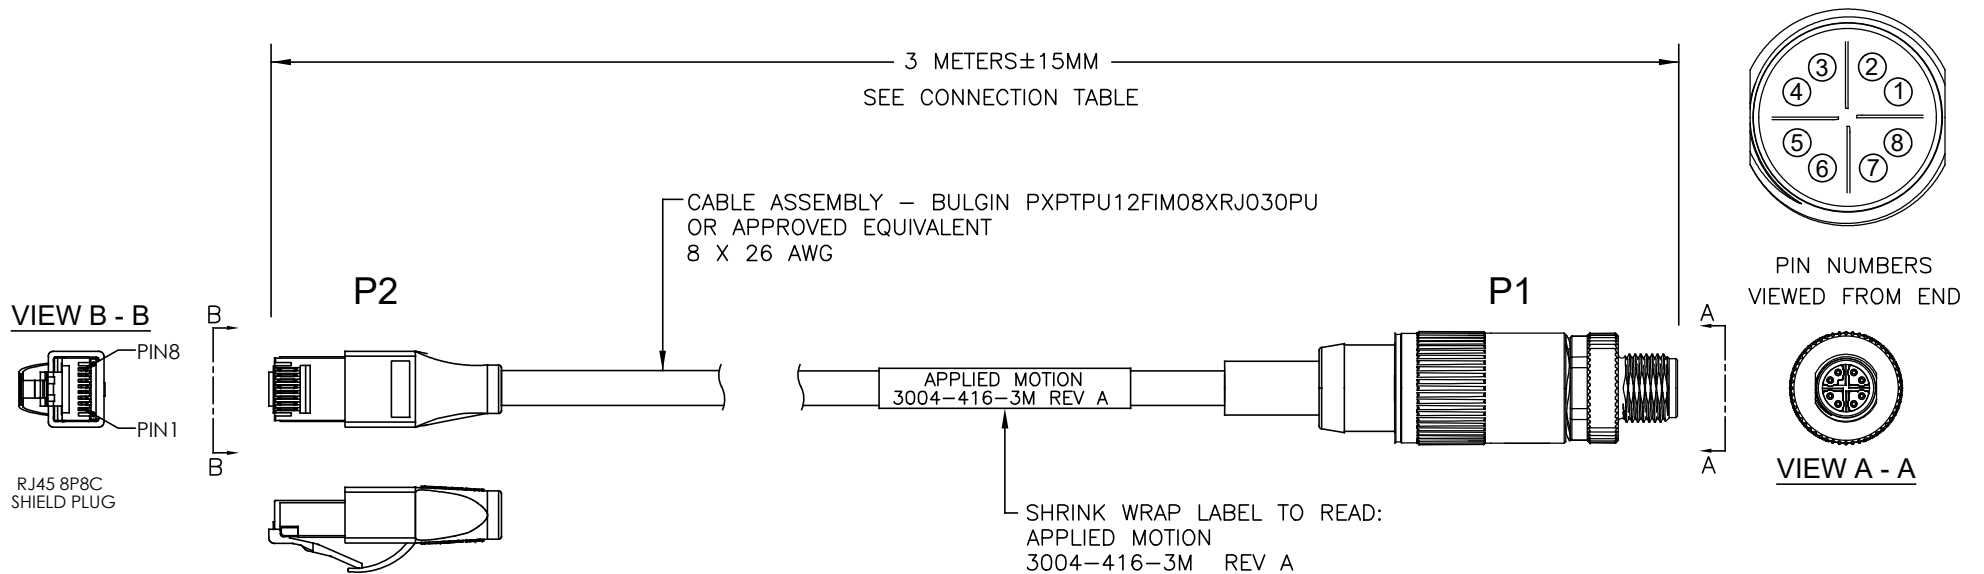

NOTES: UNLESS OTHERWISE SPECIFIED

- THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EC RoHS DIRECTIVE.
- TEST 100% FOR OPENS (>1 OHMS MAX) AND SHORTS (5 MEGOHMS MIN)

TOLERANCES DECIMALS: INCH [MM] X.XXX = ±.005 [0.127] X.XX = ±.010 [0.25] X.X = ±.020 [2.5] ANGLES: MACH. = ±5° CHAM. = ±5°	THIRD ANGLE PROJECTION 		APPLIED MOTION PRODUCTS, INC.	
	APPROVALS DRAWN <i>R.JONEZ</i> CHECKED APPROVED	DATE 1/13/20	CORD SET M12 X-CODED TO RJ45	
COMPUTER DATA BASE DRAWING	B	DWG NO. 3004-416-3M	REV A	SCALE: NONE SHEET 1 OF 1