

SPECIFICATIONS:

STEPS PER REVOLUTION: 200	ROTOR INERTIA: 57.0 G-CM ² (.311 OZ-IN ²) REF
STEP ANGLE: 1.8°	DETENT TORQUE: 153 G-CM (2.1 OZ-IN) MIN
STEP TO STEP ACCURACY: ± 5 % [1], [2]	INSULATION CLASS: B
POSITIONAL ACCURACY: ± 5 % [1], [3]	BEARINGS: ABEC 3, DOUBLE SHIELDED
HYSTERESIS: - %	WEIGHT: 280 G (9.8 OZ) APPROXIMATE
SHAFT RUNOUT: 0.03 T.I.R.	TEMP. RISE: 80 °C MAX. [8]
RADIAL PLAY: 0.02 MAX W/A .5KG RADIAL LOAD	OPERATING TEMP. RANGE: -20 TO +50 °C
END PLAY: 0.08 MAX W/A .5KG AXIAL LOAD	STORAGE TEMP. RANGE: -30 TO +70 °C
	RELATIVE HUMIDITY RANGE: 15 TO 85 %

HT17-273

REVISIONS

ECO NO.	REV	DESCRIPTION	DATE	APPROVED
5976	A	INITIAL RELEASE	8/28/09	J KORDIK
6090	B	STANDARDIZE ENCODER HOLES	3/29/10	J KORDIK
7446	C	REVISE NOTE 10	6/6/16	J KORDIK

[7]

SPECIFICATION CONNECTION	NUMBER OF PHASE	RESISTANCE PER PHASE OHM ±10%	INDUCTANCE PER PHASE mH ±20%	RATED CURRENT Amp	RATED VOLTAGE V	HOLDING TORQUE N.m Min
BI-POLAR SERIES	2	60.0	104	0.28	16.8	0.36
BI-POLAR PARALLEL	2	15.0	26	0.57	8.5	0.36
UNI-POLAR	4	30.0	26	0.40	12.0	0.26

[1]

NOTES, UNLESS OTHERWISE SPECIFIED:


- [1] MEASUREMENTS MADE AT RATED CURRENT IN EACH PHASE.
- [2] BETWEEN ANY TWO ADJACENT STEP POSITIONS.
- [3] MAXIMUM ERROR IN 360°.
4. HIPOT 500 VAC, 60 Hz FOR ONE MINUTE.
5. LEADS: 8, 26 AWG, 7 STRAND MIN., UL AND CSA APPROVED, UL 3265, UL1430.
6. INSULATION RESISTANCE: 100 MEGOHMS MIN AT 500 VDC.
- [7] AS MEASURED USING AN A.C. INDUCTANCE BRIDGE, AT 1KHz.
- [8] AS MEASURED BY THE CHANGE IN RESISTANCE METHOD, WITH RATED VOLTAGE APPLIED TO 2 PHASES; WITH MOTOR AT REST.
- [9] SHAFT OPTION: IF DOUBLE SHAFT REQUIRED ADD "D" TO END OF PART NUMBER, DOUBLE SHAFT REQUIRES ADDED HOLES FOR ENCODER OPTIONS.
10. THIS MOTOR IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EU RoHS DIRECTIVE.
- [11] MOTOR LABEL TO INCLUDE "ROHS" COMPLIANT, 'MADE IN (COUNTRY OF ORIGIN)' AND DATE CODE.

**DRIVE SEQUENCE MODEL
BI-POLAR FULL STEP**


STEP	ORANGE & BLK/WHT	BLACK & ORG/WHT	RED & YEL/WHT	YELLOW & RED/WHT
1	+	-	+	-
2	-	+	+	-
3	-	+	-	+
4	+	-	-	+

CW(CLOCKWISE) AND CCW(COUNTER-CLOCKWISE) ROTATION WHEN SEEN FROM THE FLANGE SIDE OF THE MOTOR

WIRING DIAGRAM




LABEL DETAIL

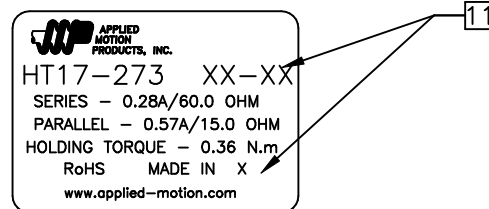

CONTRACT NO. -		APPLIED MOTION PRODUCTS, INC.			
APPROVALS	DATE	STEP MOTOR OUTLINE			
DRAWN <i>R.JONEZ</i>	<i>8/24/09</i>				
CHECKED		B	COMPUTER DATA BASE DRAWING	DWG NO. HT17-273	REV C
APPROVED			SCALE: NONE	SHEET 1 OF 2	

MOTOR DRAWING

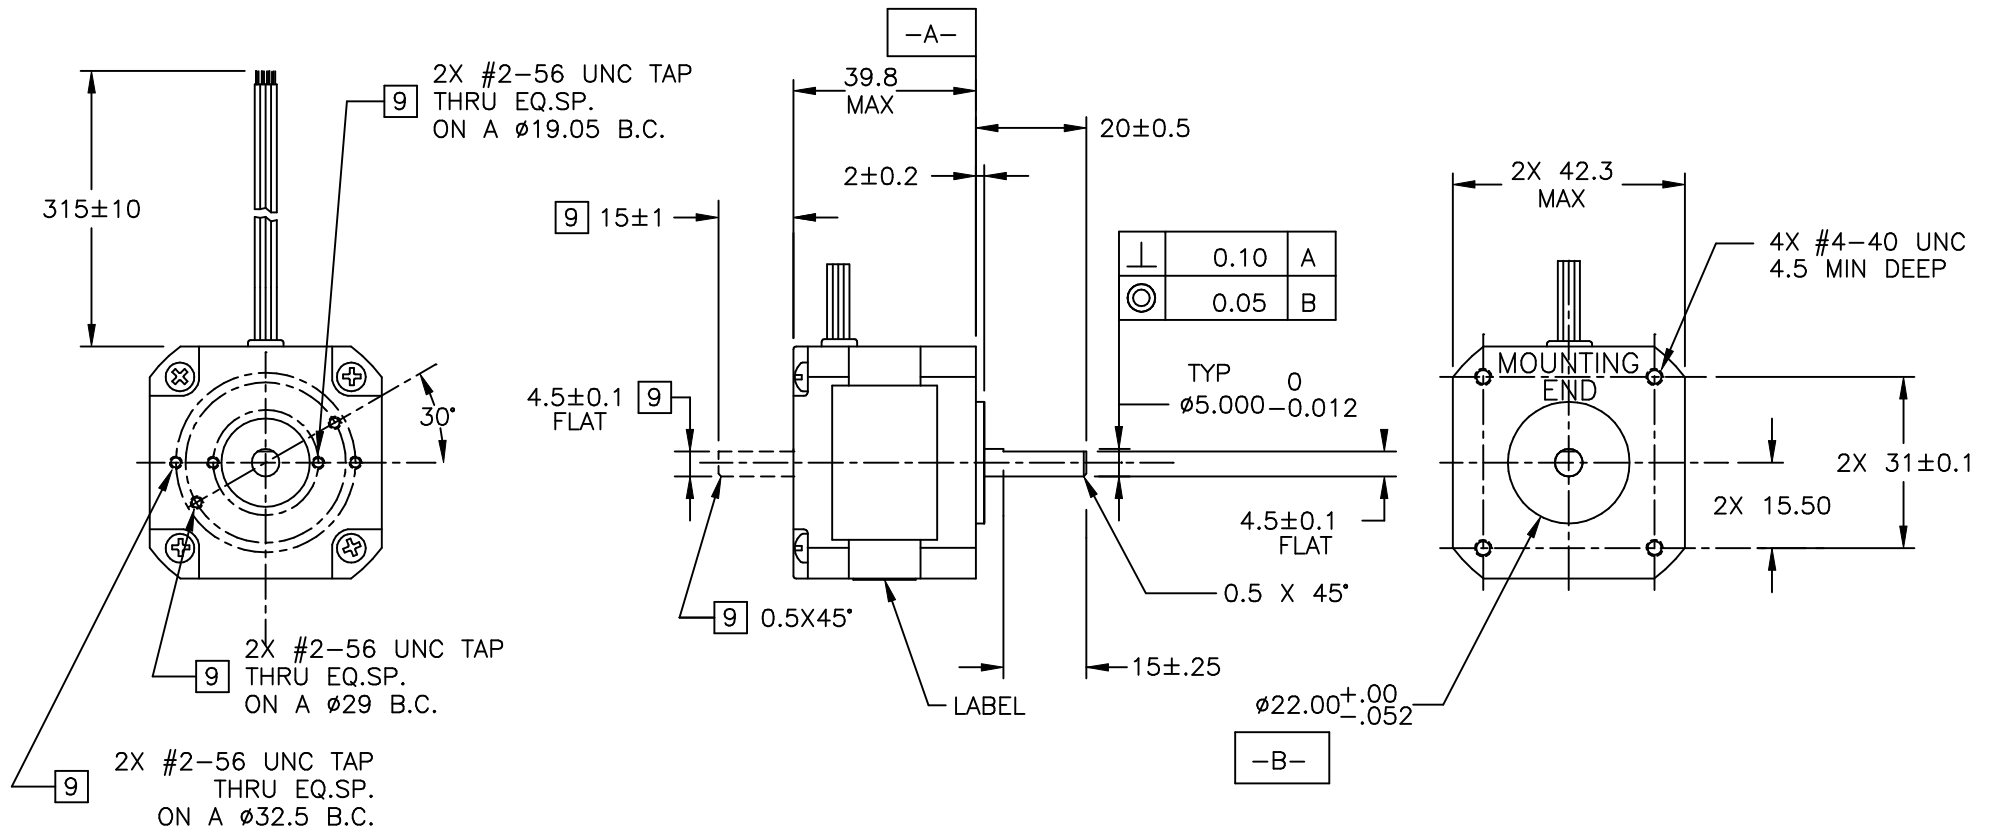

TOLERANCES		THIRD ANGLE PROJECTION		APPLIED MOTION PRODUCTS, INC.		
DECIMALS: MM (INCH)						
X.XXX = ±	(.005)					
X.XX = ±	0.13 (.010)	APPROVALS	DATE	<h2>STEP MOTOR OUTLINE</h2>		
X.X = ±	0.25 (.020)	DRAWN				
ANGLES:		CHECKED		B	DWG NO.	REV
MACH. = ±	5°	APPROVED		HT17-273		C
CHAM. = ±	5°	COMPUTER DATA BASE DRAWING		SCALE: NONE	SHEET 2 OF 2	