


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE ECO 7494	11/14/16	J KORDIK

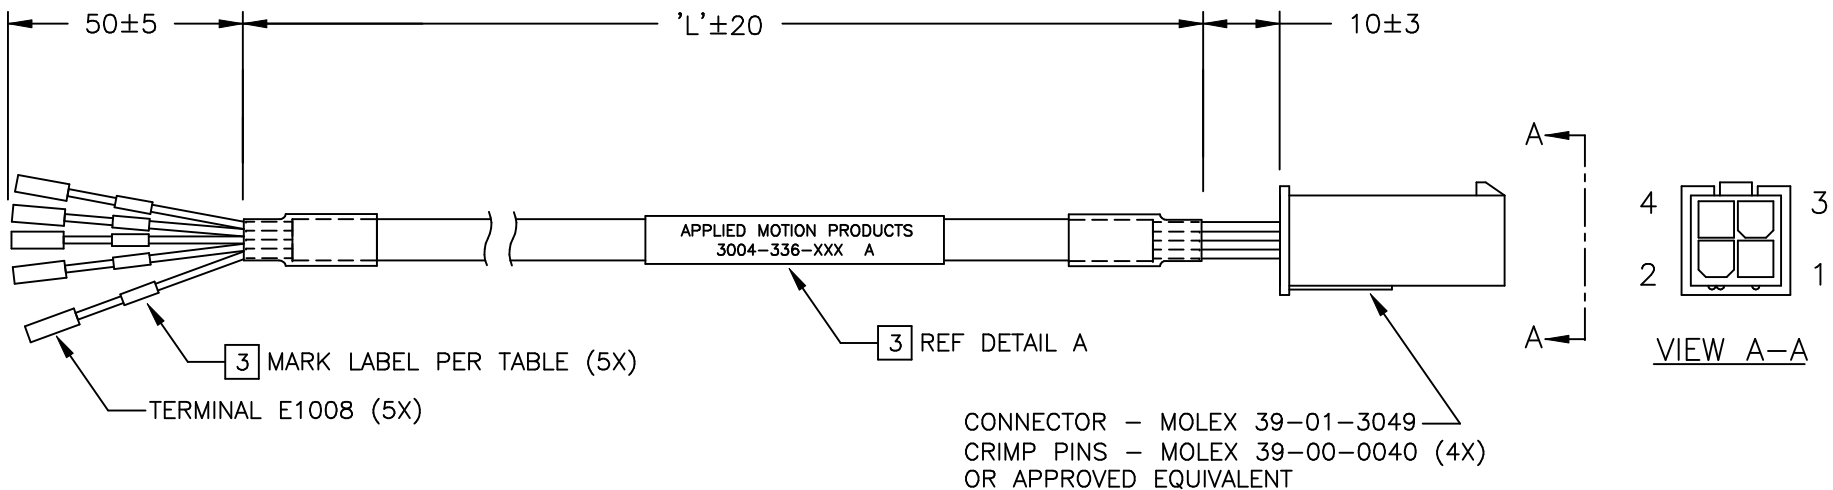

APPLIED MOTION PRODUCTS
3004-336-XXX A

DETAIL A
LABEL NOMENCLATURE

CABLE/CONNECTOR TABLE		
PIN NO	LEAD COLOR	SIGNAL/LABEL
1	BLUE	B-
2	RED	B+
3	GREEN	A-
4	BLACK	A+
-	YELLOW/GREEN	SHIELD

TABULATION CHART			
XXX	LENGTH='L'	PART NUMBER/REV	
1M	39.4" +/- 2.0"	3004-336-1M	A
3M	118" +/- 3.0"	3004-336-3M	A
5M	197" +/- 4.0"	3004-336-5M	A
10M	393.7" +/- 4.0"	3004-336-10M	A

NOTES: UNLESS OTHERWISE SPECIFIED

- THIS CABLE IS MANUFACTURED IN COMPLIANCE WITH THE CURRENT EC RoHS DIRECTIVE.
- THIS CABLE INTENDED FOR USE WITH STEP-SERVO MOTORS AND SS-EC STEP-SERVO DRIVES.
- REFER TO TABULATION CHART FOR DASH NUMBER, REVISION., WIRE COLOR AND SIGNAL NAME.
- CABLE IS SHIELDED, FLEXIBLE, AWG18 CONDUCTORS, UL1007, UL 2464

TOLERANCES DECIMALS: MM (INCH) X.XXX = ±0.013 (.005) X.XX = ±0.25 (.01) X.X = ±2.5 (0.1) ANGLES: MACH. = ±5° CHAM. = ±5°	THIRD ANGLE PROJECTION 		 MOTOR POWER CABLE SS-EC STEP-SERVO
	APPROVALS DRAWN <i>R.JONEZ</i> CHECKED APPROVED	DATE 9/7/16	
COMPUTER DATA BASE DRAWING	APPROVED	REV A	SHEET 1 OF 1